


GO SP-1319 Start Here



IMPORTANT: Before using this product, make sure you read these instructions and the safety instructions in the online [User's Guide](#).

The illustrations show the ET-8500, but the steps are the same for the ET-8550, unless otherwise specified.


1 Unpack

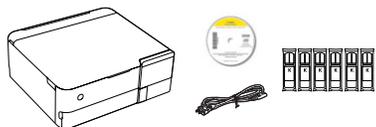


Note :

- Do not open the ink bottles until you are ready to fill the ink tanks. The ink bottles are vacuum packed to maintain reliability.
- The CD/DVD tray is on the bottom of paper cassette 2.

- 1 Remove all protective materials from the product.




- 2 Lift up the scanner unit and remove all protective materials from inside the product.

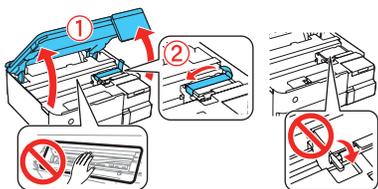

Caution : Do not touch the areas shown inside the product. The printer ships with the transportation lock in the printing position. Do not move it from the printing position.

- 3 Connect the power cord to the back of the product and to an electrical outlet.



Caution : Do not connect to your computer yet.

You can set up your product to print and scan wirelessly from your mobile device or computer using the Epson Smart Panel™ app. To use the app, see “Setup from a mobile device” on the back of this sheet. If you do not want to use the app for setup, go to the next section.

2 Fill ink tanks


Warning : Keep the ink bottles out of the reach of children and do not drink the ink.

Caution : This product requires careful handling of ink. If ink spills, wipe it off immediately with a damp towel to avoid permanent stains. If ink gets on your clothes or belongings, it may not come off.

Note :

- Use the ink bottles included with the printer to set up the product. Part of the ink will be used to charge the print head.

- 1 Press the power button to turn on the product.




Note : If an error message appears, turn off the product and check that no protective material has been left inside the product and that the transportation lock is in the printing position.

- 2 Select your language on the LCD screen.


Note : You can change this setting later using the product's control panel. For more information, see the online [User's Guide](#).

- 3 Open the ink tank cover, then open the cap for the black (BK) ink tank.




Note : Black ink to be filled in all tanks

- 4 Unpack the black (BK) ink bottle. Hold the ink bottle upright and slowly turn the bottle cap to remove it.




Caution : Do not shake or squeeze the ink bottles. Do not touch the top of the ink bottle after its cap is removed.

- 5 Insert the ink bottle into the filling port.




Note : Do not force the bottles into position; and remember to use Black ink to fill all tanks

- 6 Wait for the ink to fill the tank. Do not squeeze the bottle.




Note : Ink flows into the tank and stops automatically when the ink is filled to the upper line. If ink does not flow from the bottle, lift and reinsert the bottle.

- 7 When the ink tank is full, remove the ink bottle and securely close it with the cap. If any ink remains in the bottle, close the bottle and store it for later use.




Note : Do not leave the ink bottle inserted; otherwise the bottle may be damaged or ink may leak.

- 8 Securely close the black ink tank cap.



- 9 Repeat the previous steps for the other tanks.

- 10 Close the ink tank cover and lower the scanner unit.

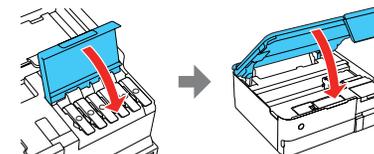

- 11 When the message to see the [Start Here](#) sheet appears on the LCD screen, press and hold **OK** for 5 seconds.

- 12 Follow the instructions on the LCD screen and select **Start** to start charging the ink. Ink charging takes approximately 7 minutes.

Caution : Do not unplug or turn off the product, raise the scanner unit, or load paper while the product is charging or you'll waste ink.



Note : The included ink bottles are designed for reliable printer setup and cannot be resold. After setup, the remaining ink is available for printing.

- 13 Follow the on-screen instructions to adjust the print quality of your product.

Note:


- You need to load paper before you can adjust the print quality. See “Load paper” for details.
- You can change these settings later using the product's control panel. For more information, see the online [User's Guide](#).

Caution : After setup, periodically inspect the ink levels to ensure they are not below the lowest line on the tanks. Prolonged use when ink is below the lowest line could damage the product. See the online [User's Guide](#) for refilling instructions.

3 Load paper

See the instructions below for loading paper in cassettes 1 and 2.


Note : See the online [User's Guide](#) for a complete list of compatible paper types, sizes, and capacities, and instructions on loading paper in the rear paper feed slot.




- 1 Make sure the product is done charging the ink, and then lower the front cover.




- 2 Pull out the paper cassette for the paper you are loading.

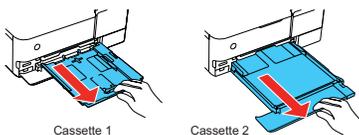

- 3 Slide the edge guides out.



- 4 Insert paper with the glossy or printable side facedown.




Note: For cassette 1, make sure the paper is not sticking out past the triangle symbol at the end of the cassette.

- 5 Slide the edge guides against the paper, but not too tightly. Make sure the paper is under the tabs on the edge guides.



- 6 Keep the cassette flat as you insert it all the way.

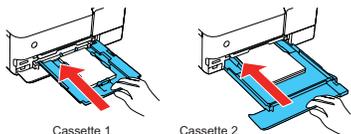

Note: Keep the front cover open so the output tray can automatically extend after you send a print job. After printing, select **Output Tray** on the home screen to close the output tray.

- 7 Select the paper settings on the product's control panel.

For 13"x19" size

- 1 Pull the Rear Tray and slide the edge guides.
- 2 Insert the media with the printable side up.

4 Install software

Note :

- If you are using a Mac or your computer does not have a CD/DVD drive, an Internet connection is required to obtain the product software.

- 1 Make sure the product is **NOT CONNECTED** to your computer.

Windows *: If you see a Found New Hardware screen, click **Cancel** and disconnect the USB cable.

- 2 Insert the product CD (Windows only) or download and run your product's software package. For the latest software, visit:

ET-8550

www.epson.com/support/et8550 (U.S.)

www.epson.ca/support/et8550 (Canada)

- 3 Follow the instructions on the computer screen to run the setup program.
- 4 When you see the Select Your Connection screen, select one of the following:

- **Wireless connection**

In most cases, the software installer automatically attempts to set up your wireless connection. If setup is unsuccessful, you may need to enter your network name (SSID) and password.

- **Direct USB connection**

Make sure you have a USB cable (not included).

- **Wired network connection**

Make sure you have an Ethernet cable (not included).

Any problems?

Network setup was unsuccessful.

- Print a network connection report to identify network problems and solutions. See your online [User's Guide](#) for instructions.
- Make sure you select the right network name (SSID).
- If your network has security enabled, make sure you enter your network password (WEP key or WPA passphrase) correctly. Be sure to enter your password in the correct case.
- Restart your router (turn it off and then on), then try to connect to it again.
- If you see a firewall alert message, click **Unblock** or **Allow** to let setup continue.

There are lines or incorrect colors in my printouts.

Run a nozzle check to see if there are any gaps in the printout. Then clean the print head, if necessary. See the online [User's Guide](#) for more information.

The product's screen is dark.

Make sure your product is turned on and touch the screen to wake it from sleep mode.

Setup is unable to find my product after connecting it with a USB cable.

Make sure your product is on and the USB cable is securely connected.

Any questions?

User's Guide

Windows: Click the icon on your desktop or Apps screen to access the online [User's Guide](#).

Mac: Click the icon in Applications/Epson Software/Guide to access the online [User's Guide](#).

If you don't have a User's Guide icon, go to the Epson website in this section.

Technical support

Visit www.inkjetbiz.com

Call us at (408) 394-7595 or email us at support@inkjetbiz.com

Need paper and ink?

Visit our website at www.inkjetbiz.com

Call us at (408) 394-7595 or email us

at orders@inkjetbiz.com

