

Dye Sublimation Profiles for Epson (Mac)

How to load a profile in Adobe Suite Applications

This bulletin describes the procedure on how to use custom profiles for Dye Sublimation Ink. The images below correspond to a profile created and loaded in Adobe Photoshop, but applies to other products of the suite.

Install the driver of the printer **ET-2750**


Driver installation is very intuitive, follow the instructions and your printer will be installed.

Be sure the ink is loaded before installing the driver. Check the box that indicates it has been charged .

Once finish, a notification will show up.

Download your profile from:

<https://drive.google.com/drive/folders/1ISfkGO0hEf74hEwhapahn4EelqJ-YFY8?usp=sharing>
and save them in your computer

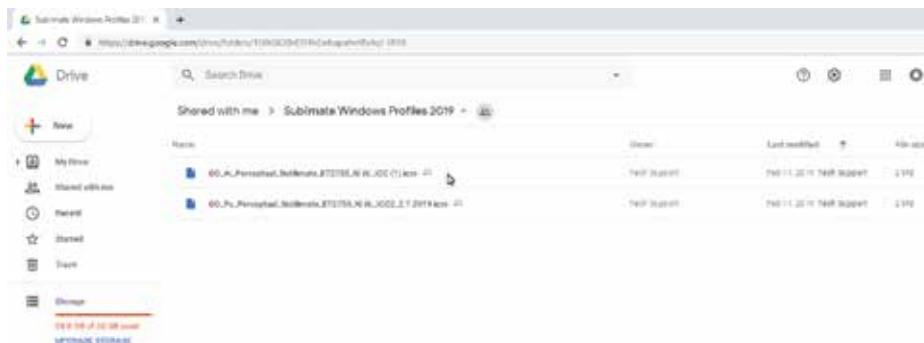


Copy it to the Profiles folder in your Mac iOS

Images will show how to access the path to save the profile


Go to **Finder** , select Computer or click Command + C




On Mac Drive select **Library**.

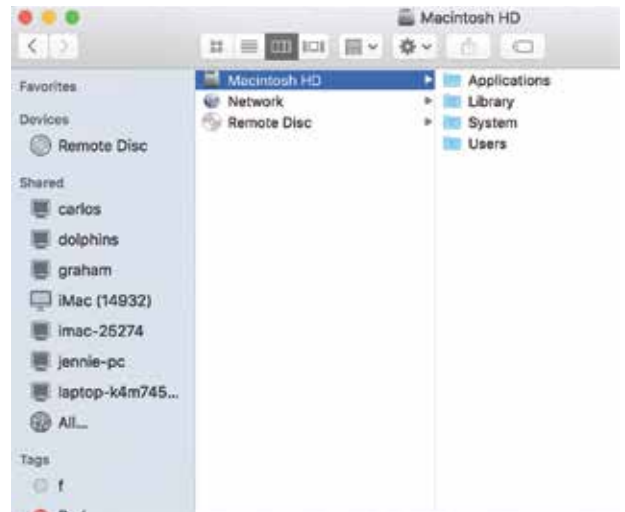


Search for **ColorSync** folder and click on it.

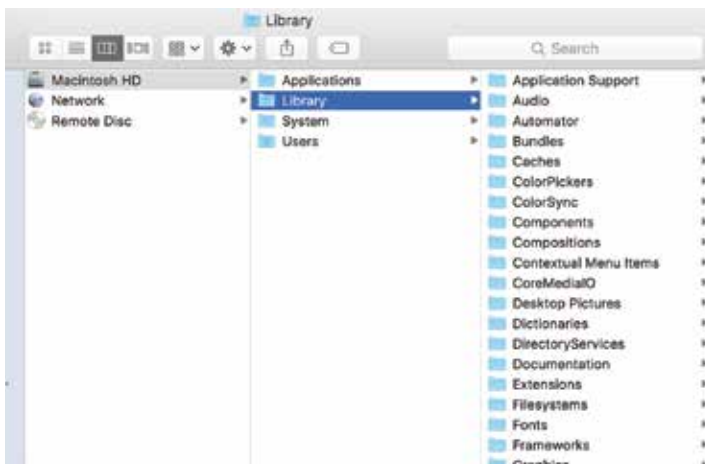


Select **Profiles** and click on it.

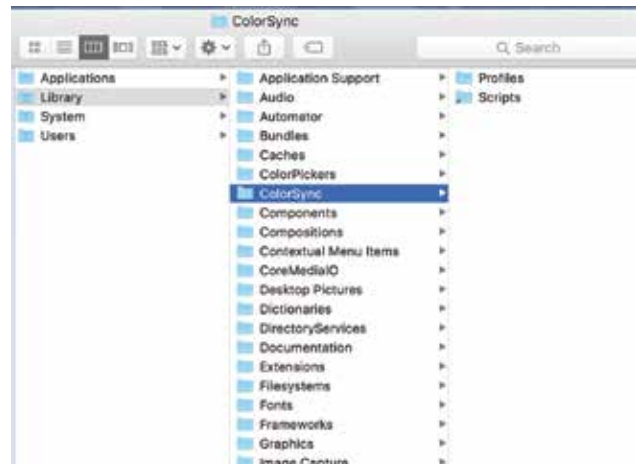

Search for another **Profiles** folder and click on it.

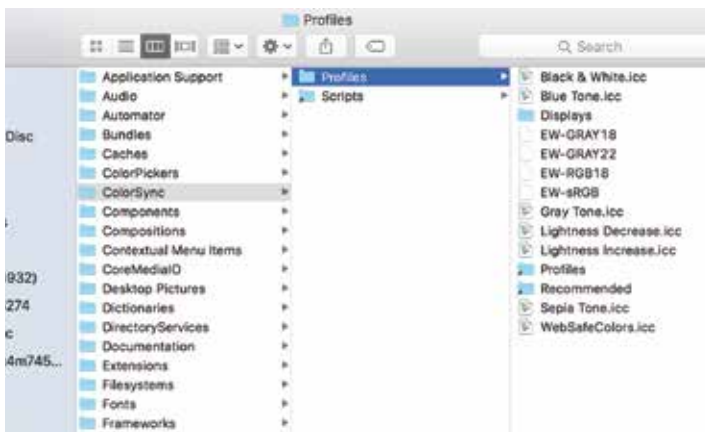


Paste the downloaded profile in this location.

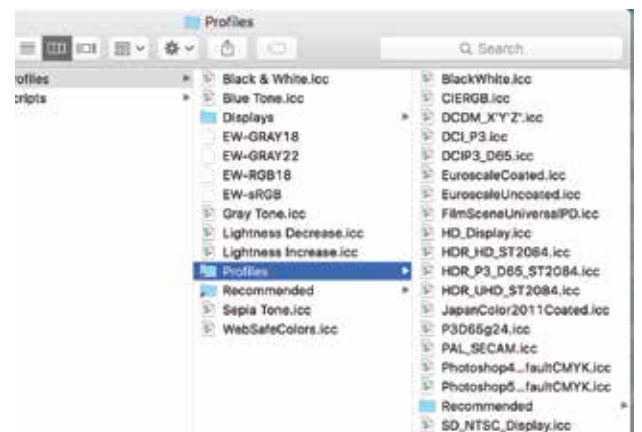

Now you are ready to work on your **Photoshop App**.

1. Open your original file

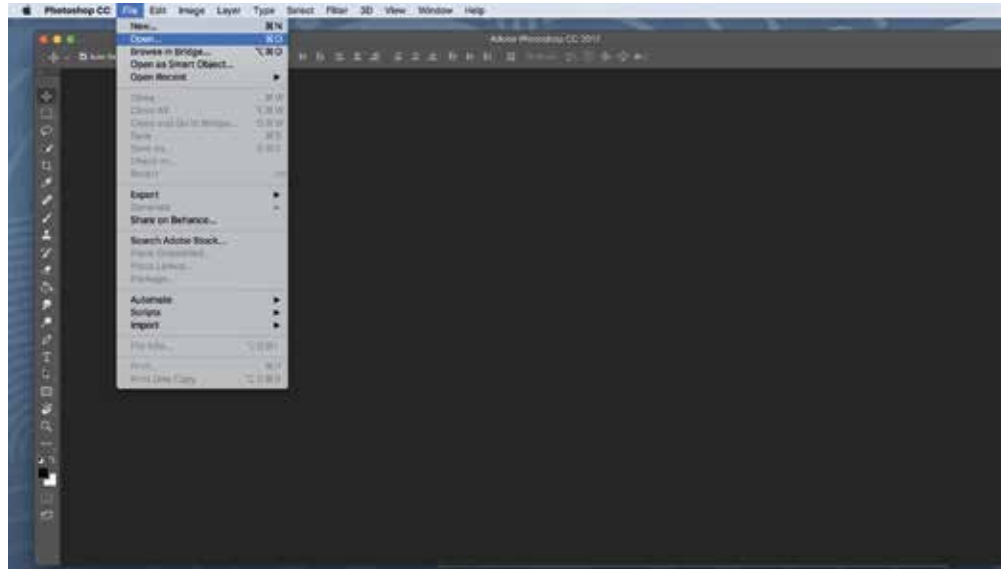


2. Send your image to print



3. In the print menu, verify your Epson printer is selected, once this is done look for the *Color Management* option, go to *Color Handling* and select **Photoshop Manage Colors**.




Then select the *Printer Profile Tab* scroll down and select the **Custom Color Profile**.

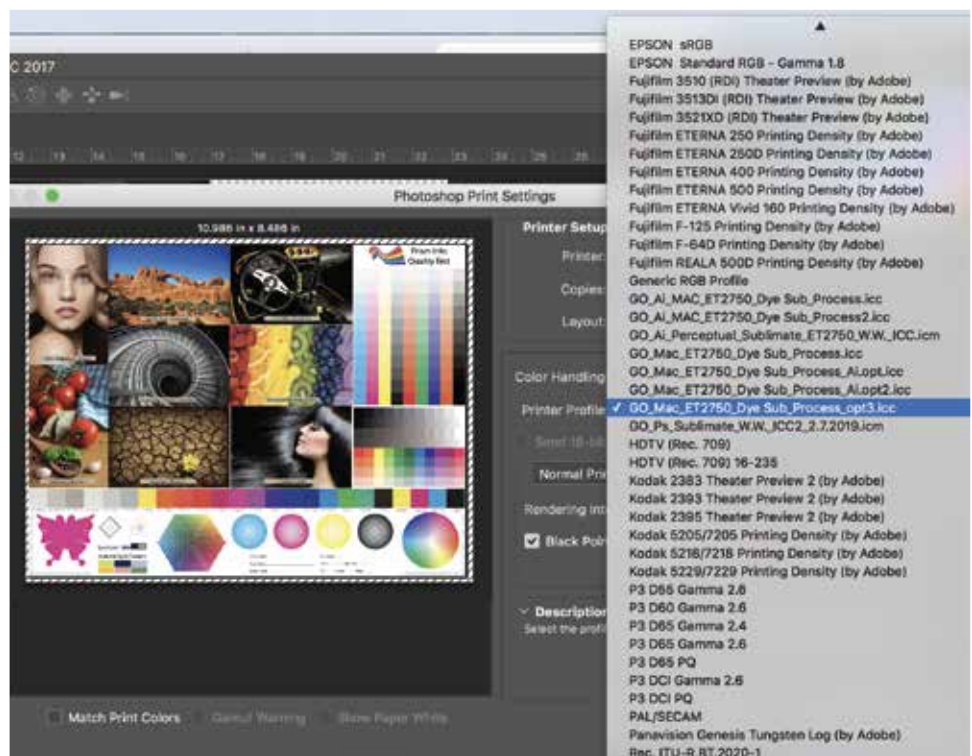

Be sure your *Rendering Intent* is set to **Perceptual**




4. Go to *Print Settings*

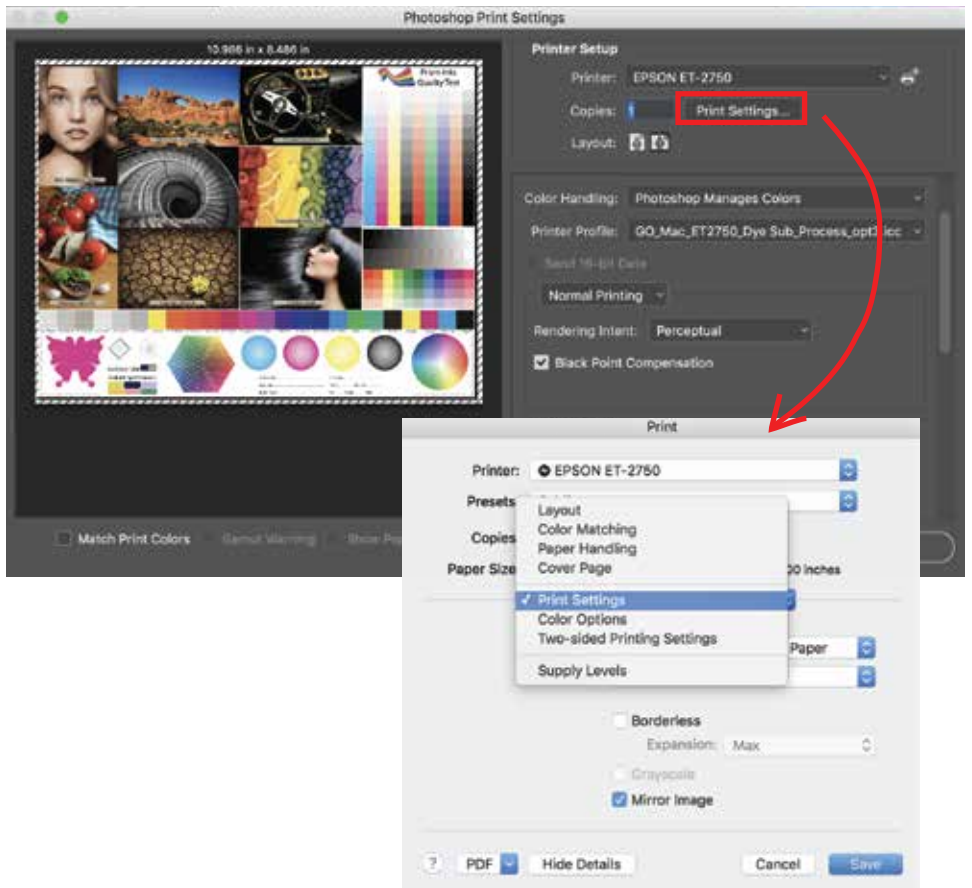


Select the following settings below for printing. :

A. Size US Letter 8.5"x11".

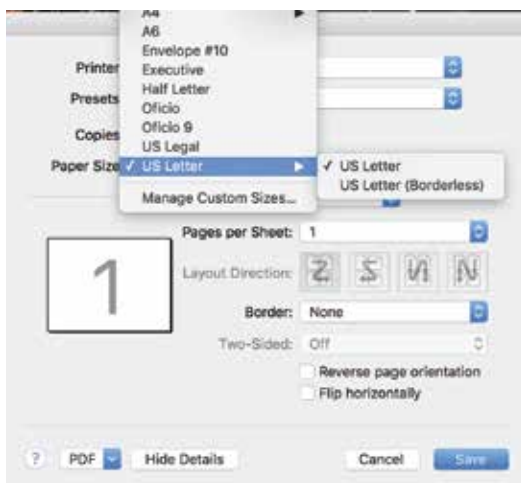


B. Paper Type Plain.

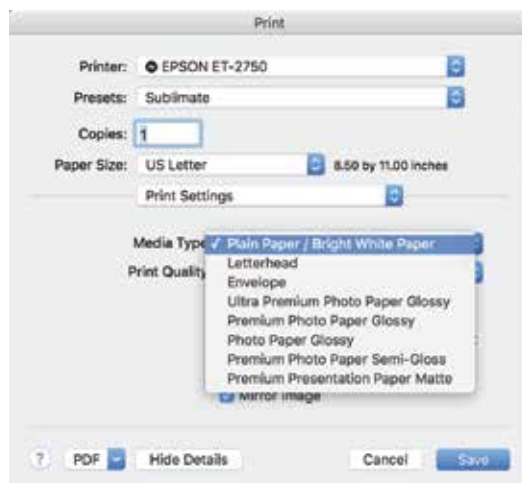


C. Print Quality Quality.




D. Select Color Matching.

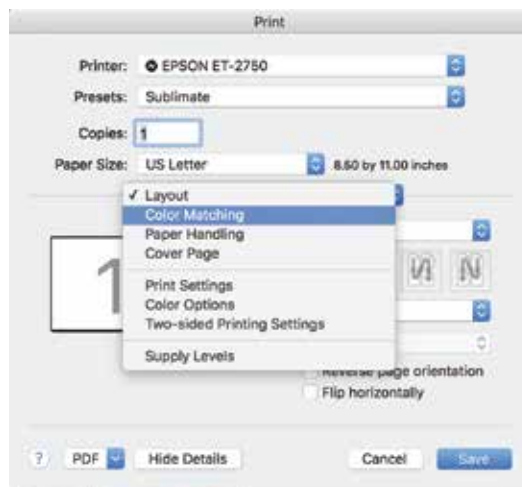

E. Color Matching will show inactive

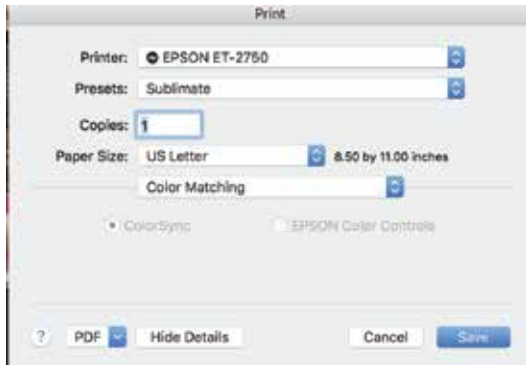


F. Select Color Options, will show this warning.

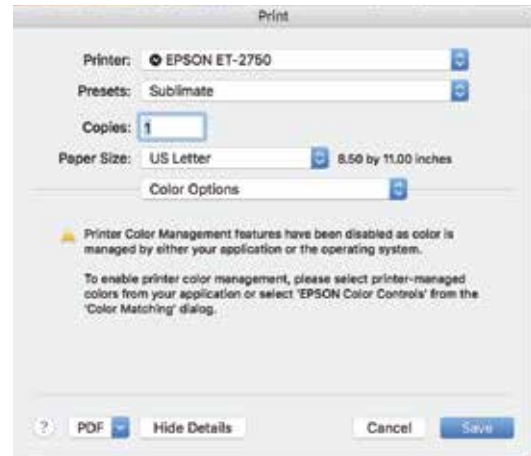

** Remember to print in Mirror*

5. Print image and transfer.

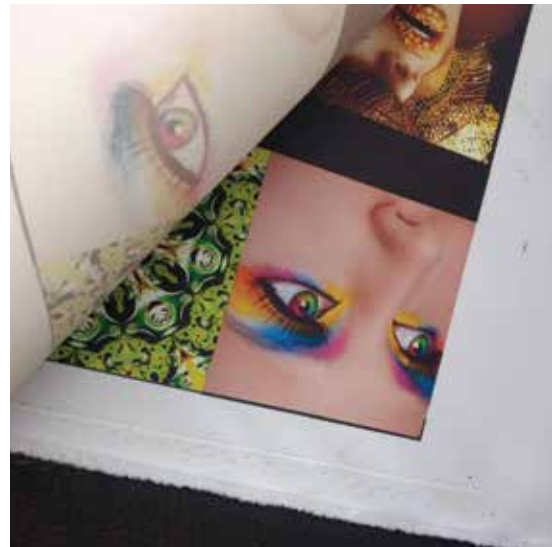

Polyester Material Type Temperature/Time Recommendations: 392 Farenheit / 35-45 Sec

Note: Different materials need different Temp/Time please test for best results.



Call Us: (408) 394-7595 • www.inkjetbiz.com