

CadLink FilmMaker


GO ET-8550 FilmMaker RIP Setup, No Dongle Installation

PROMO CODE


This bulletin describes the procedure for the installation and setup of FilmMaker Rip Software. This procedure is only for the GO ET-8550 SP printer.

1. In your browser go to:
<https://www.cadlink.com/product/filmmaker10/>

Click on Free Trial, and the file will be downloaded to your computer.

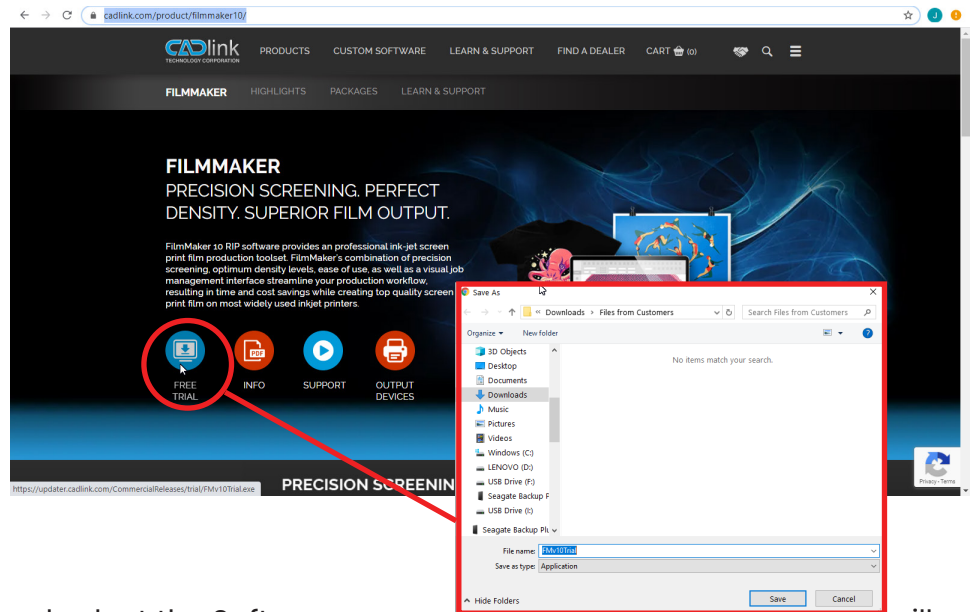

2. Run the downloaded file and select the Software you use:
 FilmMaker v10 DTP+.

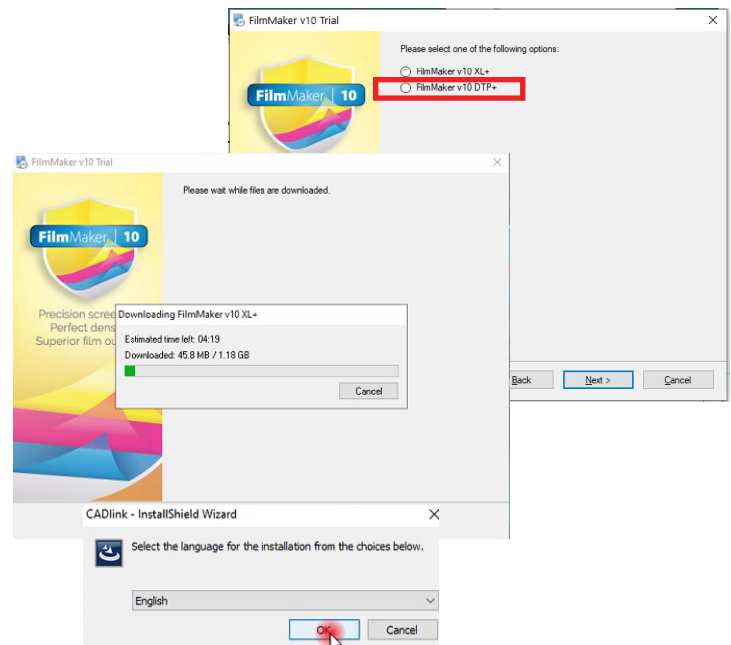


Call Us at: (408) 394-7595 • www.inkjetbiz.com

Follow the instructions the wizard provides.

The installer will let you know once the installation process is finished. Press Close when finished.



From your recently added software list, select **FilmMaker**.




As soon as you run the software, a window will open asking for the registration pin.

Select [Click here if you already have a PIN number and you wish to activate it.](#)



Add the Software Activation PIN. This pin can be located at the top of Page 1.


Fill out the form with your information and click on **Submit** at the bottom of the form.

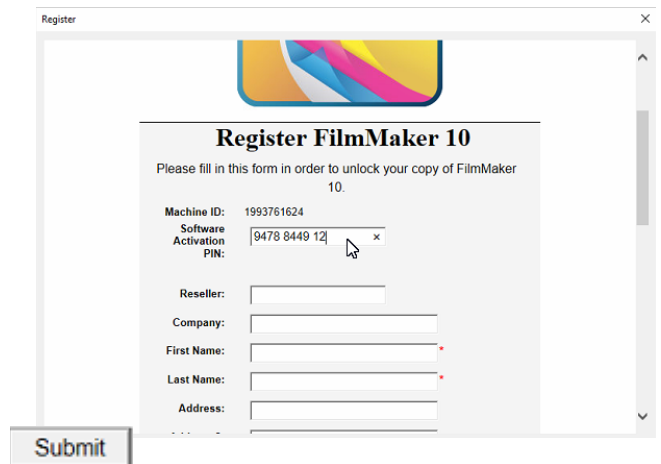


3. The software will open the **Queue Wizard** and it will help you install the printer driver.

Note: Printer must be loaded with ink and connected to the computer. Please refer to the **Start Up Guide- Fill Ink Tanks** section for the proper procedure.

Read each step carefully, and press Next.

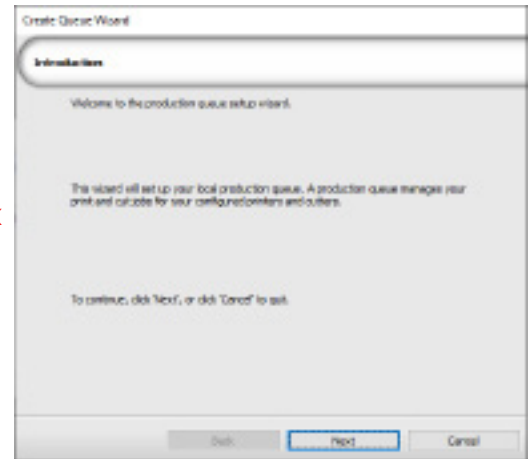


Click on Printer and select from the Printer drop-down menu the following printer model:
Epson ET-8550 Separations.

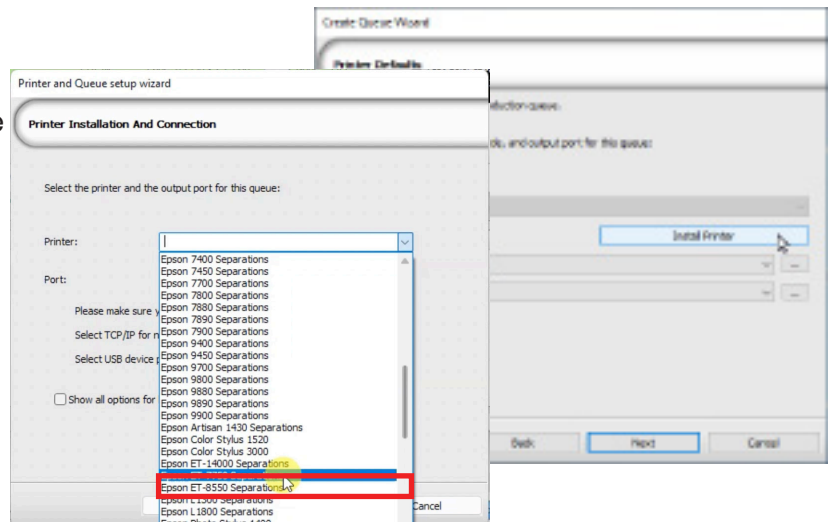

Next, select Port. This port can be USB or Network, depending on the printer connection with the computer.


Note: A WiFi connection is considered a TCP/IP Network Connection

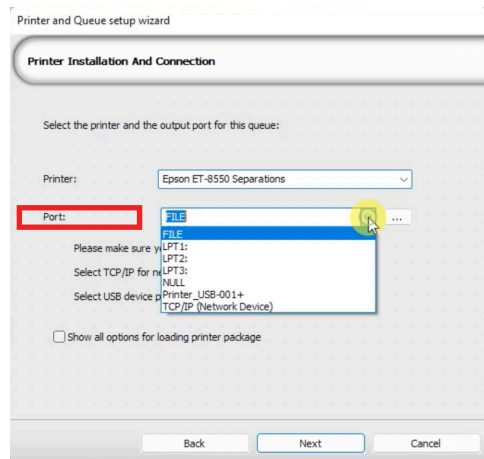

Select the type of media you will use in your printer.

For GO ET-8550 SP, select Sheet Media from the Type dropdown menu.


Then, select the default media size that you will print on.

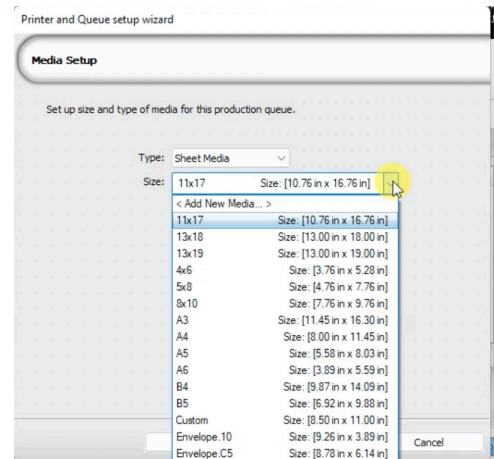


Select your Resolution.

For the GO ET-8550 SP, the following resolutions can be used:

- 1440 x 1440 Big Dots
- 1440 x 1440 Small Dots
- 1440 x 720 Big Dots
- 1440 x 720 Small Dots

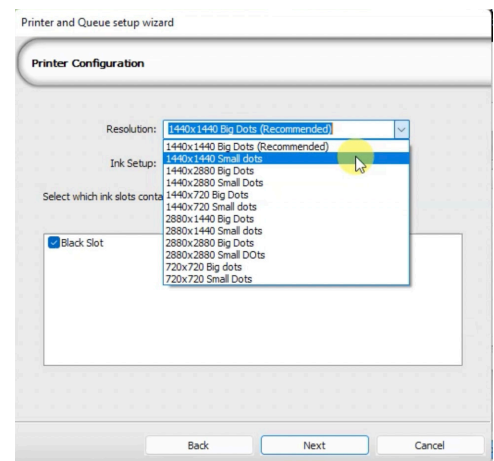


Select Ink Setup and click on Multiple Black, then select all the channels

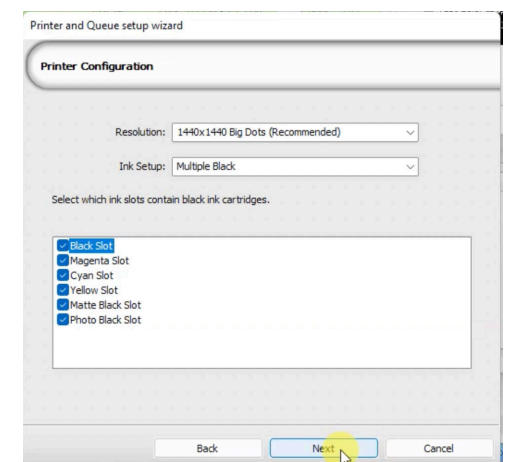

Call Us at: (408) 394-7595 • www.inkjetbiz.com

You can also rename the printer with your own description.

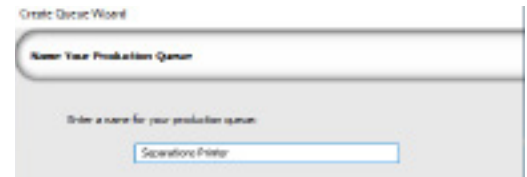


Once the printer installation is completed, a window will prompt you to print a Density Test Page.

RECOMMENDATION

Based on our internal testing, we recommend that on Section 3 of the **Density Test Page** you enter the following ink density target number based on the use of GO ScreenMate™ Film:”

RESOLUTION	CHANELS	DENSITY
1440 X 1440 Big Dots	All	7
1440 x 1440 Small Dots	All	11
1440 x 720 Big Dots	All	13
1440 x 720 Small Dots	All	19

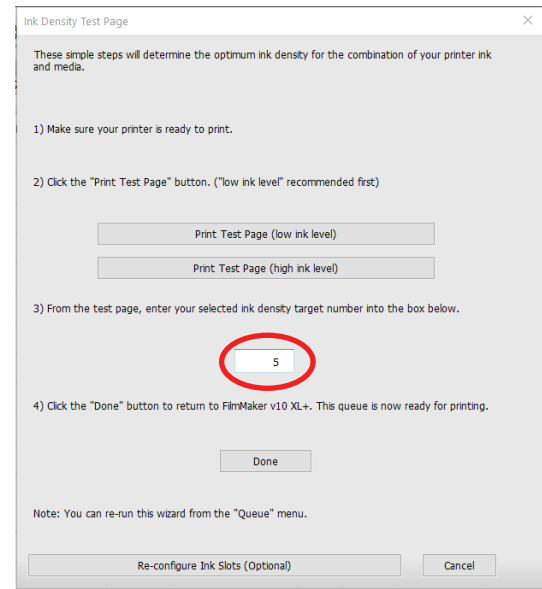

When you have inputted the Density Target, click **Done**.

4. You are ready to work with FilmMaker!

IMPORTANT: Please ensure that it states that the version of the printer driver used for the ET-8550 should be 1.3, which is critical for proper print output. If a window pops up asking for the color reference on Matte Black, select the Black color from the chart.

